


# UFACE-302

Linux-Based Multi-Biometric Time Attendance & Access Control System

- High verification speed
- Advanced and user-friendly UI
- Chip encryption for firmware protection
- - Optional built-in battery backup providing approximately, 4 hours of continuous operation
- Easy to extend functions and customize client's requirements
- One face template is registered for one user only

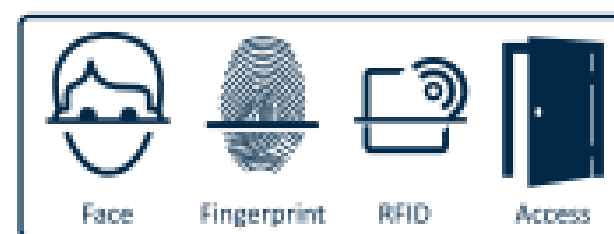

## TECHNICAL SPECIFICATIONS

- Face Capacity : 3000
- Fingerprint Capacity : 4000
- ID card Capacity : 10000
- Transaction Capacity : 100000
- Push Data : Yes
- Communication : TCP/IP, RS232/485, USB Host
- Display : 4.3-Inch Touch Screen
- Power Supply : 12V 3A
- Operating Temperature : 0 °C ~ 45 °C
- Operating Humidity : 20% - 80%
- Dimension (in mm) : 193.6 x 165.2 x 86
- Package Weight : 1.6 kg
- Automatic Status Switch, Self-Service Query, Work Code, SMS, DST, T9 Input, 9 Digit User ID, Scheduled Bell,
- Photo ID Access Control Interfaces for: 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm
- Wiegand : Output
- Optional Functions - MiFare Card, Wi-Fi, 3G, 2000 mAh Backup Battery, FR-1200
- Battery is not Included in the Package.

