



Security at Fingertips

SB-ES-3216-2


Multi Lane Swing Barrier

Specification

Size (L*W*H) : 1400*160*980mm
Fuselage material : Top cover 1.2mm+body 0.9mm 304 brushed plate
Diaphragm material : 8mm clear acrylic
Baffle material : 10mm clear acrylic
Pass width : 600-900mm
Movement : Brushless swing brake integrated movement
Power supply : 24V 150W
Input voltage : AC100V~240V,50/60HZ
Equipment power : 55W
Drive motor : Fengdun DC brushless 90K 30W
Pass rate : Open 50 people/min; Usually closed 35 people/min
Speed of opening and closing : Adjustable from 0.5s to 1.5s
Sensor pairs : 6pairs
Pilot lamp : Three color light panel+three color light strip
Communication mode : Dry contact
Controls : 1V2 brushless simplified board +electric control box+mesh board box
Temperature : -20°C~+70°C | Noise : <65dB
Humidity : <90% No condensation
Class of protection : IP4X



Dimension

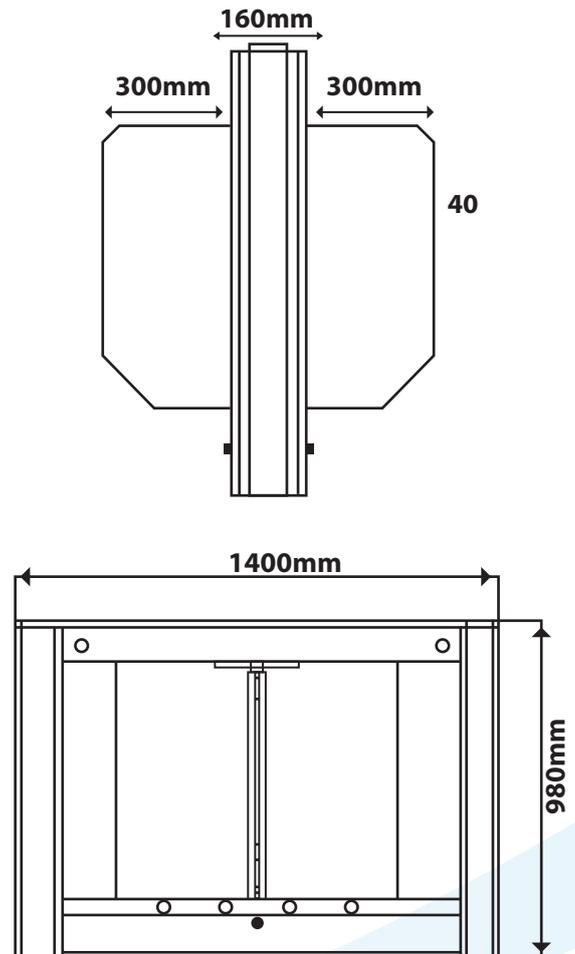

Disclaimer : Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

www.esslsecurity.com

ISO FC CE ROHS