


## F22+ID+WIFI

Ultra Thin Fingerprint & RFID Time Attendance & Access Control System.

### Features:

- 2.4inch TFT color screen and Touch keys
- Full Access Control Features: Anti-passback, access control interface for 3rd party electric lock, door sensor, exit button, alarm
- Standard Wi-Fi
- Network interface by TCP/IP or RS485
- Built-in auxiliary input with enhanced flexibility to link with wired detector or emergency switch
- Multiple Verification Modes: Multi-verification methods (card is optional) providing user various choices

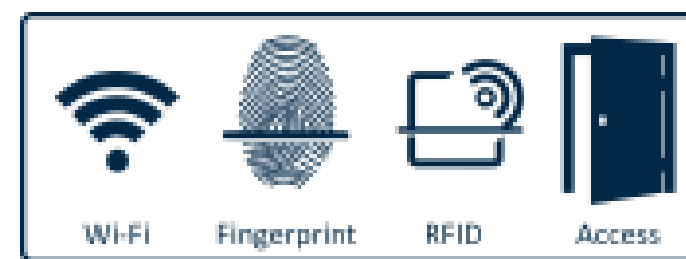

### TECHNICAL SPECIFICATIONS

- Fingerprint Capacity : 3000
- Card Capacity : 5000
- Finger Algorithm : Finger VX10.0
- Record Capacity : 30000
- CPU : 32 bit Microprocessor
- Coreboard : ZLM60
- Fingerprint sensor : 500 DPI SilkID sensor
- FAR :  $\leq 0.0001\%$
- FRR :  $\leq 1\%$
- Identification speed :  $< 0.5$  sec
- Algorithm Ver : 10
- Display : 2.8-inch TFT Screen
- Keypad : Yes
- LED Indicator : Green/Red
- Communication : RS232/485, TCP/IP, USB-host, Built in Wi-Fi
- Wiegand : In & Out
- Push Data : Yes(support both static IP and domain server)
- Standard Features : work code, SMS, DLST, Self service query, Status Switch
- DST, Automatic Status Switch, Record query, T9 input, 14 digit user ID, Anti-passback Mifare (Optional)
- Power Supply : DC 12V --- 1.5Amp
- Operating Temperature :  $0^{\circ}\text{C} - 45^{\circ}\text{C}$
- Operating Humidity : 20% - 80%
- Dimension (in mm) : (L)158.5 x (W)78.0 x (H)19.4mm
- Support exit readers : FR 1200, Push Button, KR500, Notouch, KR503
- 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm
- Power Supply not Included in the Package

